

C type Execution

Cタイプ 施工図

30kg

安全で確実な展示を可能にするためには天井の骨材や壁面の基礎などの構造が重要な要素となります。

Cタイプ(推奨荷重30kg)の性能を十分に引き出すために前もって構造および取付部材の確認を行うことがさらなる安全性を高めます。

C Type (Recommended load 30kg) construction

The composition and stability of the ceiling and foundation of the wall is a major factor in exhibiting mediumweight displays. Check the exhibition space and pieces that will be hung from the picture rail to make sure that they are under the recommended load limit in order to ensure safety.

品 名 Name of product	取付ピッチ Pitch for attachment	直付用ネジ Screw for direct attachment
C - 1	300mm以内	3.5mm
C - 1A		
C - 2A		
C - 2B		
C - 2D		
C - 2E		
C - 2S		
C - 3A		
C - 5		
C - 5A		


取付けの注意事項

- ピクチャーレールのジョイント部および端部は、50mm以内にネジで取付けてください。
- ピクチャーレールは補強された下地に取付けてください。
- 軽量天井材 (Mバー $t \geq 0.4$ mm以上) への取付けは軽量用 (推奨荷重10kg) の扱いになります。


Installation suggestions

- The joints and ends of the picture rail are attached by using screws, which must be attached 50mm between the joints or from the end of the picture rail.
- Please attach the picture rail to the reinforced base.
- Only picture rails for lightweight displays (Recommended load 10kg) can be attached to lightweight ceiling materials (M-bar over $t \geq 0.4$ mm).
- Picture rails for lightweight partitions (Stud) need to be reinforced.


C - 1 モルタル壁 取付例 Mortar wall

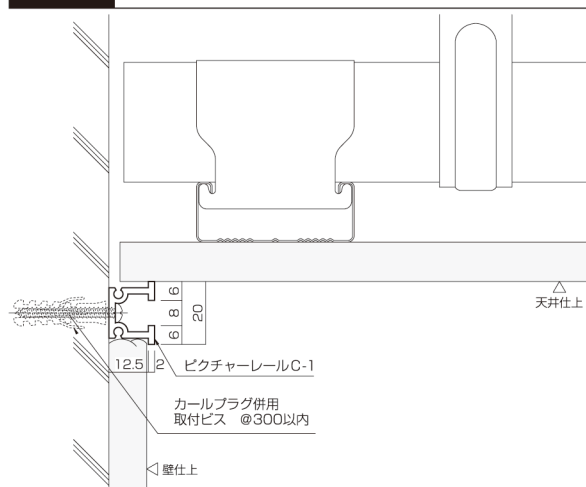


C - 2S モルタル壁 取付例 Mortar wall

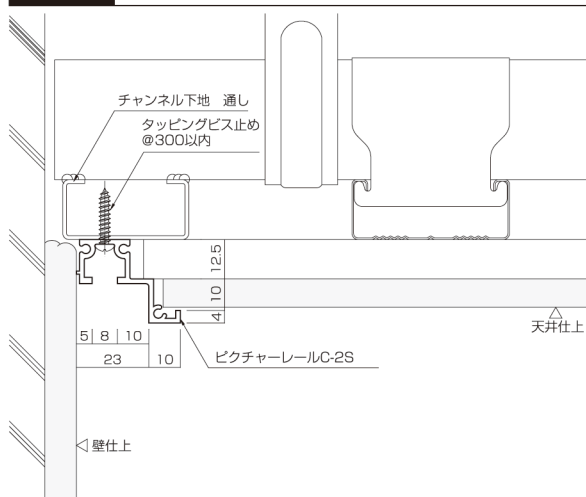

C - 1A 軽量鉄骨壁 取付例 Lightweight steel frame wall

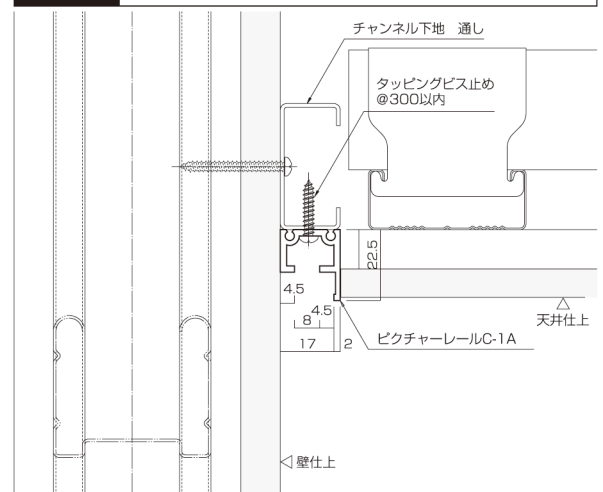

C - 1 軽量鉄骨壁 取付例 Lightweight steel frame wall

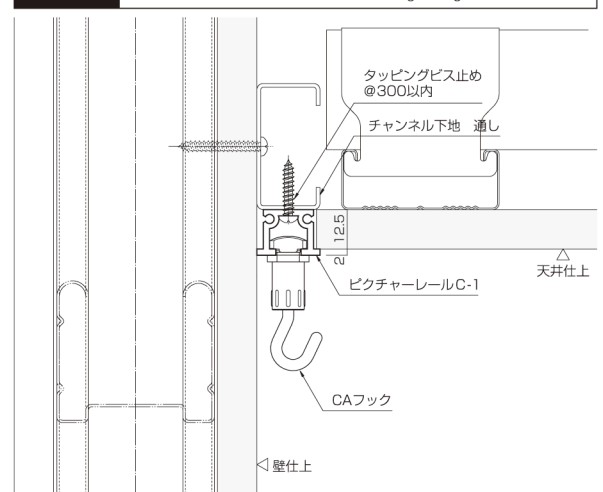

C - 2S 軽量鉄骨壁 取付例 Lightweight steel frame wall

