


# ANCHOR

-アンカー-

オールアンカー(鉄/電気亜鉛メッキ)


コンクリート 重量用

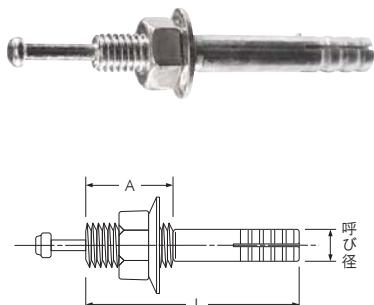

商品番号	規 格 (呼び径×L)	ねじ長さ (A)	取付物厚	ドリル径	コンクリート強度21N/mm <sup>2</sup> (210kgf/cm <sup>2</sup> )			埋込み深さ (mm)
					比例最大荷重	引張最大荷重	剪断最大荷重	
46-041B	6×45	15	1~5	6.4	2.0 (200)	3.9 (400)	6.3 (652)	30
46-042B	6×60	20	1~20	6.4	2.0 (200)	3.9 (400)	6.3 (652)	30
46-043B	8×50	20	1~5	8.5	3.5 (360)	6.9 (705)	10.1 (1,030)	35
46-044B	8×70	25	1~25	8.5	3.5 (360)	6.9 (705)	10.1 (1,030)	35
46-045B	10×60	25	1~6	10.5	7.1 (732)	11.5 (1,180)	16.0 (1,640)	40
46-046B	10×80	25	1~26	10.5	7.1 (732)	11.5 (1,180)	16.0 (1,640)	40
46-051B	10×90	30	1~36	10.5	7.1 (732)	11.5 (1,180)	16.0 (1,640)	40
46-047B	12×60	20	1~6	12.7	10.0(1,020)	14.3 (1,460)	23.3 (2,380)	40
46-048B	12×70	25	1~6	12.7	13.3 (1,360)	17.9 (1,826)	23.3 (2,380)	50
46-052B	12×90	30	1~26	12.7	13.3 (1,360)	17.9 (1,826)	23.3 (2,380)	50
46-053B	12×100	40	1~36	12.7	13.3 (1,360)	17.9 (1,826)	23.3 (2,380)	50
46-049B	16×100	40	1~20	17.0	23.7(2,425)	31.5 (3,215)	47.9 (4,890)	60
46-050B	16×120	40	1~40	17.0	23.7(2,425)	31.5 (3,215)	47.9 (4,890)	60

オールアンカー(ステンレス/生地)


スクリート 重量用

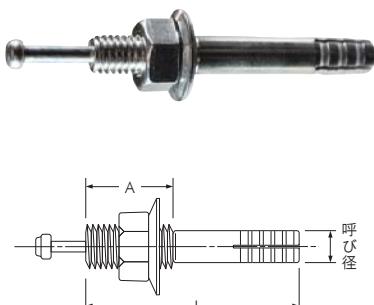

商品番号	規格 (呼び径×L)	ねじ長さ (A)	取付物厚	ドリル径	コンクリート強度21N/mm <sup>2</sup> (210kgf/cm <sup>2</sup> )			埋込み深さ (mm)
					比例最大荷重	引張最大荷重	剪断最大荷重	
46-031B	6×45	15	1~5	6.4	2.0 (205)	4.5 (462)	6.7 (684)	30
46-032B	6×60	20	1~20	6.4	2.0 (205)	4.5 (462)	6.7 (684)	30
46-033B	8×50	20	1~5	8.5	3.4 (350)	6.5 (670)	10.6 (1,080)	35
46-030B	8×70	25	1~25	8.5	3.4 (350)	6.5 (670)	10.6 (1,080)	35
46-034B	10×60	25	1~6	10.5	4.5 (466)	10.2 (1,048)	16.9 (1,720)	40
46-036B	10×80	25	1~26	10.5	4.5 (466)	10.2 (1,048)	16.9 (1,720)	40
46-037B	10×90	30	1~36	10.5	4.5 (466)	10.2 (1,048)	16.9 (1,720)	40
46-035B	12×70	25	1~6	12.7	10.7(1,100)	17.1 (1,750)	24.4 (2,490)	50
46-038B	12×90	30	1~26	12.7	10.7(1,100)	17.1 (1,750)	24.4 (2,490)	50
46-039B	12×100	40	1~36	12.7	10.7(1,100)	17.1 (1,750)	24.4 (2,490)	50
46-040B	16×100	40	1~20	17.0	20.2 (2,060)	29.9 (3,050)	50.3 (5,130)	60

## グリップアンカー(鉄/電気亜鉛メッキ)


ヨシケイ 重量用



商品番号	規格 (ねじの呼び)	全長 (L)	外径 (D)	ねじ長さ (A)	ドリル径	コンクリート強度21N/mm <sup>2</sup> (210kgf/cm <sup>2</sup> )	埋込み深さ (mm)
						引張最大荷重	
46-011B	M6	30	10.5	10	11.0	9.3(950)	30
46-012B	M8	35	12.0	13	12.5	12.7(1,300)	35
46-013B	M10	40	14.0	15	14.5	14.9(1,520)	40
46-014B	M12	50	17.3	20	18.0	25.5(2,600)	50
46-015B	M16	60	21.5	25	22.0	33.3(3,400)	60
46-001B	W1/4	30	10.5	10	11.0	9.3(950)	30
46-002B	W5/16	35	12.0	13	12.5	12.7(1,300)	35
46-003B	W3/8	40	14.0	15	14.5	14.9(1,520)	40
46-004B	W1/2	50	17.3	20	18.0	25.5(2,600)	50

#### グリップアンカー(ステンレス/生地)

ヨシケイ 重量用



商品番号	規格 (ねじの呼び)	全長 (L)	外径 (D)	ねじ長さ (A)	ドリル径	コンクリート強度 21N/mm <sup>2</sup> (210kgf/cm <sup>2</sup> )		埋込み深さ (mm)
						引張最大荷重		
46-061B	M6	30	10.5	10	11.0	9.3(950)		30
46-062B	M8	35	12.0	13	12.5	12.7(1,300)		35
46-063B	M10	40	14.0	15	14.5	14.9(1,520)		40
46-064B	M12	50	17.3	20	18.0	25.5(2,600)		50
46-065B	M16	60	21.5	25	22.0	33.3(3,400)		60
46-092B	W5/16	35	12.0	13	12.5	12.7(1,300)		35
46-093B	W3/8	40	14.0	15	14.5	14.9(1,520)		40
46-094B	W1/2	50	17.3	20	18.0	25.5(2,600)		50